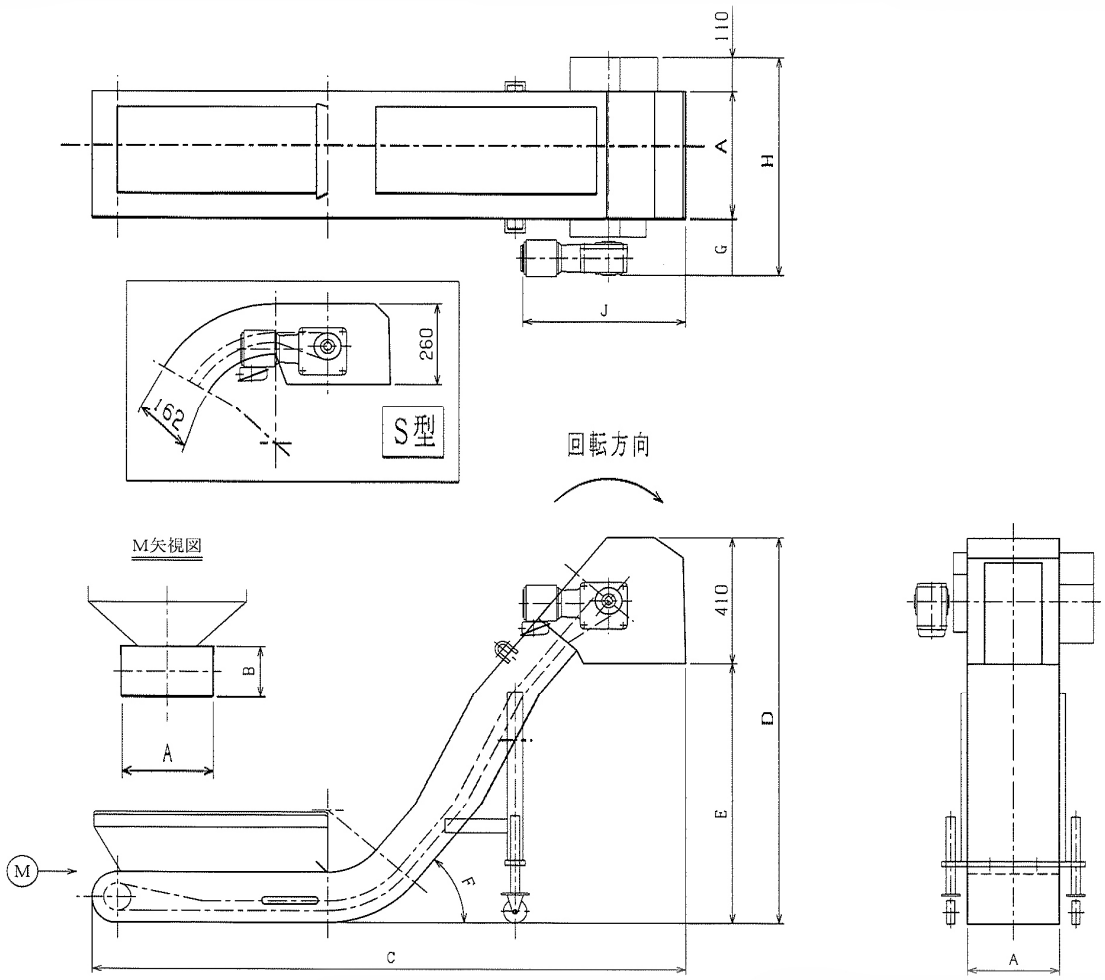

Hinge type – conveyor – hollow shaft motor - specification		
Customer		**Mister**
End user		**Mister**
A	**Width (level)**	**mm**
	Standard about 300 ~ 1100	**mm**
B	**Width (perpendicular) minimum 120 ~**	**mm**
	Standard 162.0	**mm**
C	**Full length (level)**	**mm**
D	**All the quantities (perpendicular)**	**mm**
E	**Dropping mouth height (D-410)**	**mm**
F	**Angle of inclination (standard – 50 degrees – change is possible)**	**degree**
G	**Reduction gears : 0.1 k w 168.7**	**mm**
	Reduction gears : 0.2 k w 195.7	**mm**
H	**Total width (A+G+110)**	**mm**
J	**Reduction gears : 0.1 k w 525.4**	**mm**
	Reduction gears : 0.2 k w 599.4	**mm**